

Half wing electric striker, 22 mm width for rebated doors



Description

Adjustable electric striker, with reduced covering wing, for rebated door. Available with or without repeater and with or without release lever.

NB. The repeater is internal and the good functioning is independent from the adjustment of the door gap.


Application

With panic exit locks Opera SL for wooden REI doors. Do not use on fire resistant door.

Mounting

Execute a proper milling on the frame and fix with 4x25 mm screws.

Warning! With Opera SL locks, forend 18, the striker loses the whole pressure adjustment.

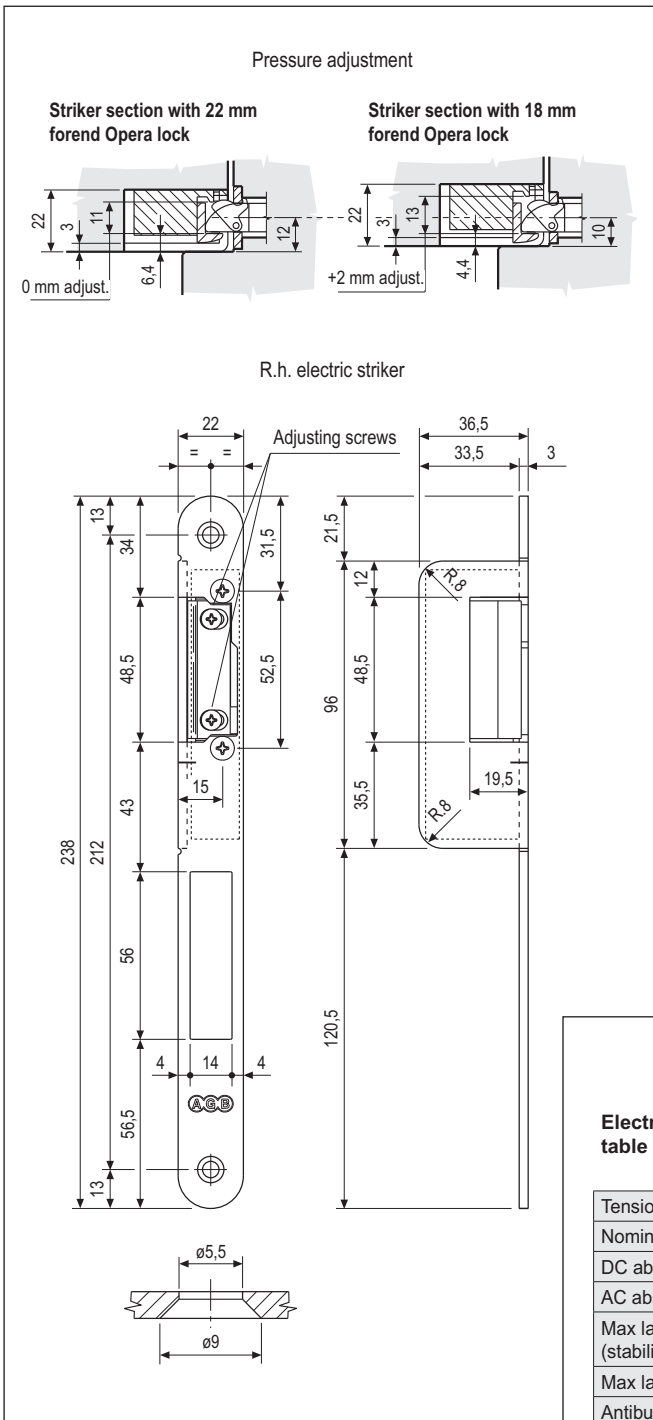

STEEL - With repeater

Article	Type	Description
B02601.03.XX	r.h.	without release lever
B02602.03.XX	l.h.	without release lever
B02601.04.XX	r.h.	with release lever
B02602.04.XX	l.h.	with release lever

STEEL - Without repeater

Article	Type	Description
B02601.01.XX	r.h.	without release lever
B02602.01.XX	l.h.	without release lever
B02601.02.XX	r.h.	with release lever
B02602.02.XX	l.h.	with release lever
B02601.05.XX	r.h.	without release lever
B02602.05.XX	l.h.	without release lever
B02601.06.XX	r.h.	without release lever + diode
B02602.06.XX	l.h.	without release lever + diode
B02601.08.XX	r.h.	without release lever
B02602.08.XX	l.h.	without release lever
B02601.10.XX	r.h.	without release lever
B02602.10.XX	l.h.	without release lever

NB. "R.h." and "l.h." refers to pull doors according to DIN 107 regulation. Refer to price list in force in order to verify the availability of the finishes.

Repeater: it is an internal device wich stores the pulse and keeps the movable part of the device unblocked until the door is opened and then closed again. In all AGB electric strikes this device is internal and not bounded to the latch. When using badge readers or similar temporised for more than 3 seconds, we recommend to use electric srtikes without repeater.

Without repeater: the electric strikers allows the opening of the door only while receiving the pulse. When the pulse stops, the strikes blocks itself even if the door was not opened.

Manual release lever: it allows too keep the door constantly unblocked.

Diode: the electric devices with diode work on DC current only. It is a device which prevents the electric system from the overvoltage.

Electronic device data table (collected at 20° C)	Low absorption			Normal absorption	
	B0260X.05	B0260X.06	B0260X.08	B0260X.01 B0260X.02 B0260X.03 B0260X.04	B0260X.10
Tension	12V+/-1V	12V ±1V	24V	12V	12V
Nominal resistance	60 Ω	58 Ω	235 Ω	7,7 Ω	17 Ω
DC absorption (stabilized)	200 mA	200 mA	105 mA	1560 mA	650 mA
AC absorption	130 mA	-	70 mA	1100 mA	440 mA
Max latch preloading - DC (stabilized)	10N	10N	10N	30N	18N
Max latch preloading - AC	80N	-	80N	120N	100N
Antiburglar resistance	3000N	3000N	3000N	3000N	3000N